

# ECLIPSE PERMA PLUS

Industry testing of our antibacterial coating showed a 99% growth retardation of E.coli and Staphylococcus aureus.

Part of the ECLIPSE range.

Reduce costs – up to 60% less expensive than stainless steel.

Long life – lasts longer than nylon coating.

Antibacterial – fights bacteria for up to 10 years.

Fully adjustable - shelf heights every 25mm.

Superior strength-to-weight ratio.

Strong & robust - up to 300kg shelf load capacity\*.

Wire construction ensures free air-flow, reducing moisture and dust accumulation.

Quick and easy to assemble - bolt-free, no specialist tools required.

Innovative design - use with PERMA PLUS shelves to create shelving units to suit you.



ECLIPSE PERMA PLUS

# ECLIPSE PERMA PLUS EPOXY COATED SHELVEING



## 10 YEAR ANTIBACTERIAL & ANTI-CORROSION GUARANTEE

- Ideal for harsher environments such as freezers and cold rooms
- Quick and easy to assemble
- Coated shelves and posts for complete protection
- Up to 300kg\* shelf load capacity UDL
- Fully adjustable - shelf heights every 25mm
- Innovative design - reduce costs and improve access by using add-on units
- Available in 81 size combinations
- 1625mm 1820mm and 2130mm height options

\*Note: Load capacity based on static units. Load capacities may vary according to design. Please contact us for accurate load bearings for your desired design.

LENGTH (mm)

| DEPTH (mm) | 460 | 610 | 760 | 915 | 1070 | 1220 | 1370 | 1520 | 1820 |
|------------|-----|-----|-----|-----|------|------|------|------|------|
| 305        |     |     | •   | •   | •    | •    |      |      |      |
| 355        |     |     | •   | •   | •    | •    | •    | •    | •    |
| 460        |     | •   | •   | •   | •    | •    | •    | •    | •    |
| 610        |     | •   | •   | •   | •    | •    | •    | •    | •    |



10 years antimicrobial and anti-corrosion guarantee

99.9% effective against most common bacterial strains

Add swivel castors for mobility. Available in 75mm, 100mm and 120mm sizes. Unbraked and braked options.



## ECLIPSE PLASTIC PLUS

PLASTIC PLUS – The strength of steel with the non-corrosive qualities of plastic. PLASTIC PLUS shelving makes use of strong box section electroplated steel with a protective coating to give frames tough enough to hold up to 360kg\* per shelf, with removable plastic shelves for hygiene.

PLASTIC PLUS complies with MoD Specification 42 - alternative to stainless steel.



ECLIPSE PLASTIC PLUS

# ECLIPSE PLASTIC PLUS POLYMER SHELVE


## 10 YEAR ANTIBACTERIAL & ANTI-CORROSION GUARANTEE WITH EXTRA HEAVY-DUTY 360KG\* SHELF LOAD



- Mix and match - removable solid or vented shelf panels
- Removable polymer shelf panels for extra hygiene
- Temperature resistant from  $-29^{\circ}\text{C}$  to  $+88^{\circ}\text{C}$
- 99.9% effective antibacterial additive to posts, frames and shelf panels
- Fully adjustable – shelf heights every 25mm
- Available in 48 size combinations
- 1625mm, 1820mm and 2130mm height options

\* Note: Load capacity based on static units. Load capacities vary according to design. Please contact us for accurate load bearings for your desired design.

| DEPTH (mm) | LENGTH (mm) |     |     |     |      |      |      |      |
|------------|-------------|-----|-----|-----|------|------|------|------|
|            | 460         | 610 | 760 | 915 | 1070 | 1220 | 1370 | 1520 |
| 460        | •           | •   | •   | •   | •    | •    | •    | •    |
| 610        | •           | •   | •   | •   | •    | •    | •    | •    |

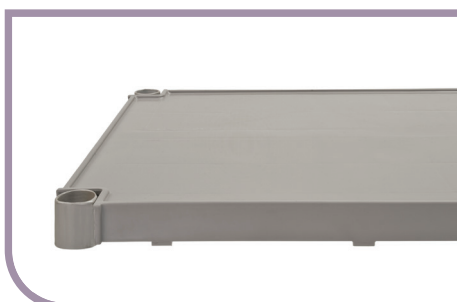

Removable polypropylene panels for easy cleaning in a commercial washer\*

\*Standard commercial dishwasher & detergents only.  
Frame wipe clean with damp sponge or water jet only.  
Temperature resistance range is  $-29^{\circ}\text{C}$  to  $+88^{\circ}\text{C}$

Add swivel castors for mobility.  
Available in 75mm, 100mm and 120mm sizes.  
Unbraked and braked options.





## EKO FIT

EKO FIT High Density Shelving - High strength anodised aluminium shelving with removable food-safe plastic shelf slats - corrosion resistant for use in cold-rooms and chillers, NSF, NF, Tuv Nord GS and HACCP accredited.

Designed for use in damp or corrosive environments, combining anodised aluminium frames and shelf supports with removable, easy to clean plastic shelf slats.



EKO FIT


# EKO FIT POLYMER SHELVING



## THE MOST FLEXIBLE SHELVING SYSTEM AVAILABLE, WITH LENGTHS UP TO 2 METRES AND 330 SIZE VARIATIONS

- Superior strength and hygiene,
- Load bearing parts are manufactured with high strength anodised aluminium, up to 250kg per shelf and 1000kg per bay UDL
- Plastic components moulded to high resistance using basic acids and bacteria proof raw materials
- Easily removable and dishwasher proof shelf slats
- Temperature resistance range is  $-30^{\circ}\text{C}$  to  $+90^{\circ}\text{C}$

\*Note: Load capacity based on static units. Load capacities may vary according to design. Please contact us for accurate load bearings for your desired design. Shelf elements suitable for cleaning in standard commercial dishwasher and detergents. Not suitable for use in autoclaves. Easy to clean wipe down surface or simply remove slats.

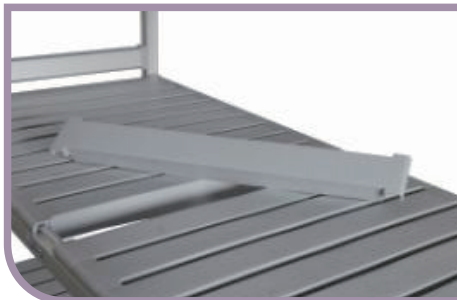

Removable polyethylene shelf elements for easy cleaning

### Available in:

- 5 depths - 300, 375, 450, 525 and 600mm
- 22 lengths - 470-2045mm in 75mm increments
- 4 heights - 1550, 1700, 2000 and 2450mm

# ECLIPSE STAINLESS STEEL WIRE

Industrial grade Stainless Steel 304

Quick and easy to assemble- bolt free and no specialist tools required

Open-wire design- allowing for excellent air flow and light penetration

Fully adjustable- shelf heights every 25mm

Strong and robust- up to 300kg shelf load capacity

Huge range of accessories available including castors, dividers etc.



ECLIPSE STAINLESS STEEL WIRE

# ECLIPSE STAINLESS STEEL WIRE SHELVING



## GRADE 304 STAINLESS STEEL, UP TO 300KG\* SHELF LOAD

- Shelves manufactured in grade 304 stainless steel, posts in hard wearing blue chrome
- Grade 304 stainless steel post upgrade option
- Innovative design - reduce costs and improve access using add - on units
- Suitable for use in many environments including wet and dry areas

\*Note: Load capacity based on static units. Load capacities may vary according to design. Please contact us for accurate load bearings for your desired design

| DEPTH (mm) | LENGTH (mm) |      |      |      |      |
|------------|-------------|------|------|------|------|
|            | 915         | 1070 | 1220 | 1520 | 1820 |
| 460        | •           | •    | •    | •    | •    |
| 610        | •           | •    | •    | •    | •    |



Quick and easy to assemble bolt - free, no specialist tools required.

Fully adjustable - shelf heights every 25mm.

Add swivel castors for mobility. Available in 75mm, 100mm and 120mm sizes. Unbraked and braked options.



STAINLESS STEEL



STAINLESS STEEL



# STAINLESS STEEL SHELVING



## FLEXIBLE STAINLESS STEEL SHELVING WITH SOLID OR VENTED SHELVES.

- Grade 304 stainless steel posts and shelves
- Temperature resistant to 30°C
- Fully adjustable - shelf heights every 100mm
- Adjustable post feet for uneven floors
- Quick and easy to assemble - bolt-free, no specialist tools required
- Up to 200kg shelf load UDL

\*Note: Load capacity based on static units. Load capacities vary according to design. Please contact us for accurate load bearings for your desired design.

| DEPTH (mm) | LENGTH (mm) |     |     |     |
|------------|-------------|-----|-----|-----|
|            | 360         | 460 | 560 | 660 |
| 660        | •           | •   | •   | •   |
| 760        | •           | •   | •   | •   |
| 860        | •           | •   | •   | •   |
| 960        | •           | •   | •   | •   |
| 1060       | •           | •   | •   | •   |
| 1160       | •           | •   | •   | •   |
| 1260       | •           | •   | •   | •   |
| 1360       | •           | •   | •   | •   |
| 1460       | •           | •   | •   | •   |
| 1560       | •           | •   | •   | •   |
| 1660       | •           | •   | •   | •   |
| 1760       | •           | •   | •   | •   |
| 1860       | •           | •   | •   | •   |
| 1960       | •           | •   | •   | •   |
| 2060       | •           | •   | •   | •   |

\*Note: Lengths include 2 x 30mm posts.

Add swivel castors for mobility.  
Available in 75mm, 100mm and 120mm sizes.  
Unbraked and braked options.



## HIGH DENSITY STORAGE



HIGH DENSITY STORAGE

# HIGH DENSITY STORAGE

## Why High Density Storage?

High density storage is a grand name for a very simple idea - get more storage into the same space by removing all but one access aisle. By using mobile units between static ends, the aisle becomes moveable; so the unnecessary aisle in the static system now become additional units in the high density system.



Shelfspan offer 2 types of High Density systems to maximise your surface area storage:

## FLOOR TRACK HD

- Mobile shelving unit slides easily along aluminium floor tracks on Grade 304 stainless steel blocks
- Use on all Eclipse range shelving & Eko Fit
- Use in dry store, cold rooms and freezers
- Lower cost than other HD options
- Retro-fit to existing Shelfspan shelving
- One piece stainless steel rolling block allows for smooth action with minimal drift
- Up to 400kg loading per mobile unit

## TRACKLESS OVERHEAD HD

- Mobile units mounted on Grade 304 stainless steel blocks glide easily on standard smooth flooring
- Kept in line with overhead aluminium guide rails and top mounted stainless steel shuttles
- No floor track, so easy to keep clean
- Use on all Eclipse range shelving & Eko Fit
- Up to 1800mm unit length and spans up to 4 metres
- Retro-fit to existing Shelfspan shelving
- One piece stainless steel rolling block allows for smooth action with minimal drift
- Up to 400kg loading per mobile unit

**Includes free site survey and end-to-end planning from concept to installation**