



Arkle

Artwork and Gallery Storage

PRODUCT FEATURES

ARKLE gallery solutions allow for the maximum utilisation of space for artwork and object storage, removing the need to handle individual items and ultimately reducing the risk of damage to artefacts.

With variations in both wall mounted (01) and pull-out (02) solutions, systems can be tailored to meet bespoke building or object storage requirements.



Popular RAL colour choices include:

RAL9016 TRAFFIC WHITE	RAL9010 PURE WHITE	RAL1013 OYSTER WHITE	RAL9002 GREY WHITE	RAL7035 LIGHT GREY	RAL7036 ARKLE GREY	RAL7021 BLACK GREY	RAL9005 JET BLACK
RAL5012 LIGHT BLUE	RAL5005 SIGNAL BLUE	RAL6005 MOSS GREEN	RAL6037 PURE GREEN	RAL1023 TRAFFIC YELLOW	RAL2003 PASTEL ORANGE	RAL3020 TRAFFIC RED	RAL3003 RUBY RED

PLEASE CONTACT US TO MAKE AN ENQUIRY OR TO DISCUSS YOUR CUSTOM ARKLE SOLUTION.

01

STATIC FRAMES FOR WALL OR FLOOR & CEILING MOUNTING


- Wall racks require a suitable supporting wall or concrete floor for fixing
- 25Kg per square metre load limit per frame
- Units can be ordered to any RAL finish
- High quality steel construction
- 50 x 50mm aperture to mesh
- All frames have a thickness of 40mm

Arkle racking systems can be tailored to meet individual briefs:

- Bespoke size requirements
- Special storage requirements
- Room and environmental constraints

PLEASE CONTACT US TO MAKE AN ENQUIRY OR TO DISCUSS YOUR CUSTOM ARKLE SOLUTION.


HEIGHT	WIDTH	PART NO.
1850	1250	ARK01-1812
2460	1250	ARK01-2412
2950	1860	ARK01-2112
2460	1860	

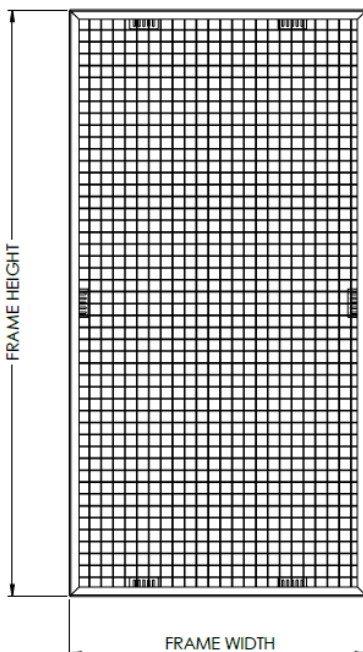


01

STATIC FRAMES FOR WALL OR FLOOR & CEILING MOUNTING PLANNING DIMENSIONS

Solution using frames fixed directly into supporting walls, suitable for most applications:

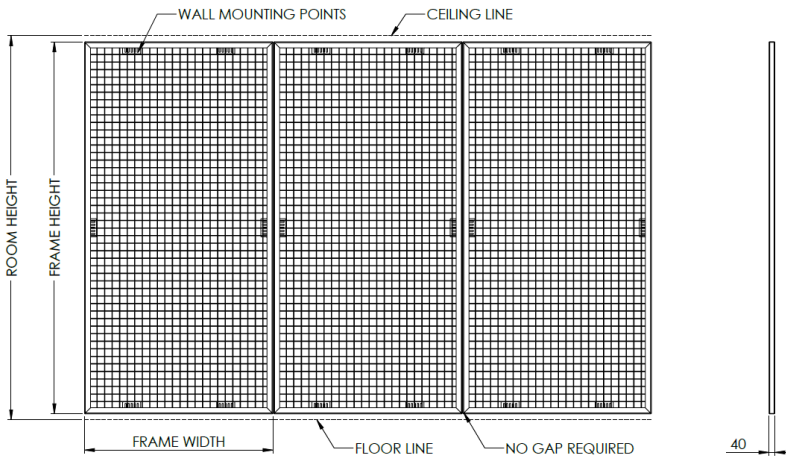

Solution using frames secured into floor and ceiling; for fixing without reinforced walls and extreme heavy duty applications:

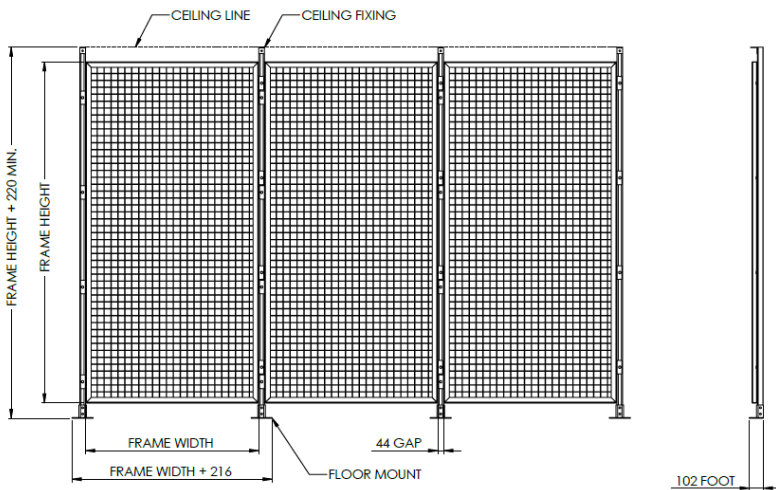

PLEASE CONTACT US TO CHECK WHICH SOLUTION BEST MEETS YOUR REQUIREMENTS AND ENVIRONMENT CONSTRAINTS.

02

PULL OUT FRAMES FOR FLOOR AND CEILING MOUNTING


- A maximum of two frames can be joined per sliding rack
- Heavy duty castor and roller bearing system guarantees smooth operation
- 25Kg per square metre load limit per sliding rack
- Floor-loaded system does not require a mezzanine floor to be installed
- Units can be ordered to any RAL finish
- High quality steel construction
- Heavy-duty black pull handle
- All frames have a thickness of 40mm
- 50 x 50mm aperture to mesh

Arkle racking systems can be tailored to meet individual briefs:

- Bespoke size requirements
- Special storage requirements
- Room and environmental constraints

PLEASE CONTACT US TO MAKE AN ENQUIRY OR TO DISCUSS YOUR CUSTOM ARKLE SOLUTION.


HEIGHT	WIDTH	PART NO.
1850	1250	
2460	1250	
2950	1860	
2460	1860	

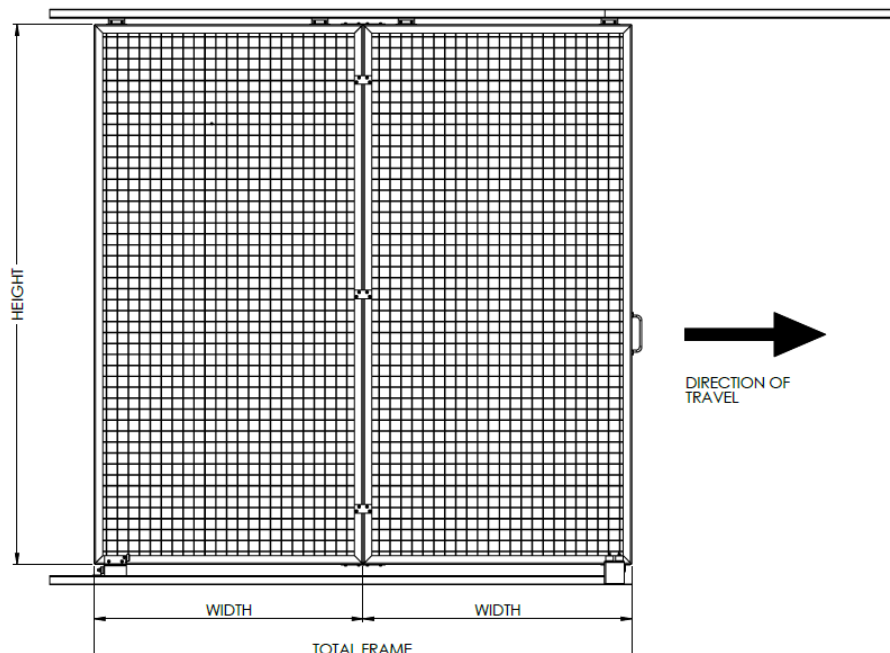


02

PULL OUT FRAMES PLANNING DIMENSIONS


Space Planning Dimensions:

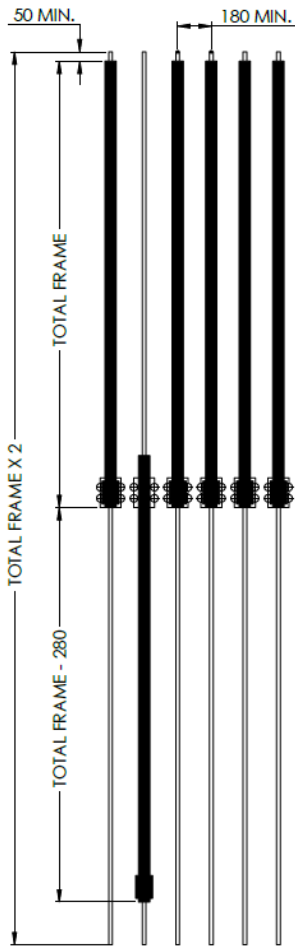

Solution using top guide rail fixed directly into ceiling, for room heights up to 3110mm:

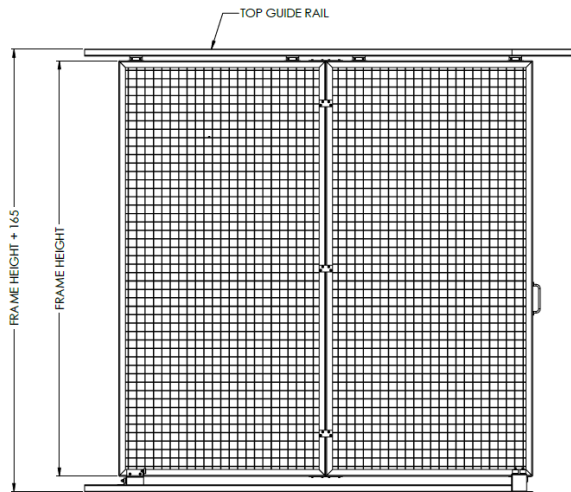

Solution using floating rails for room heights above 3110mm or bespoke applications:

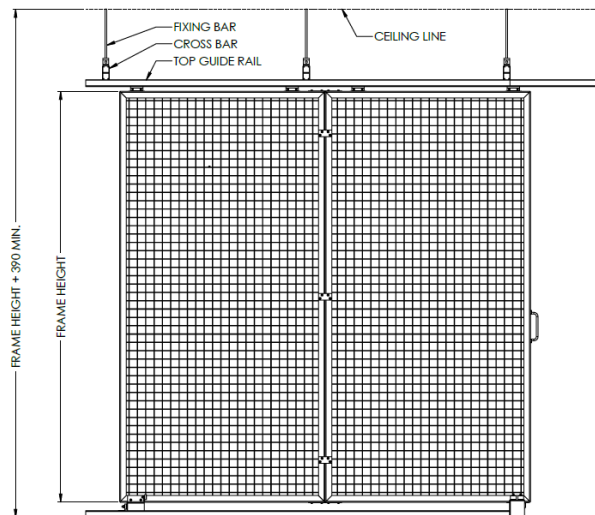

PLEASE CONTACT US TO CHECK WHICH SOLUTION BEST MEETS YOUR REQUIREMENTS AND ENVIRONMENT CONSTRAINTS.