


# STRUCTURAL PALLET RACKING

Completed by:	
Company:	
Email Address:	

<b>Number of runs</b>	
<b>Number of bays per run</b>	
<b>Clear entry - left to right (mm)</b> – max 3,900mm	
<b>Capacity per level (kg)</b> – max 3,000kgs beam load max 15,000kgs per frame	
<b>Height (mm)</b> – max 5,000mm	
<b>Rack depth</b> – max 1,100mm	
<b>Number of beam levels</b>	
<b>Specific vertical clearance between beams? (mm)</b> <i>Adjustment pitch is 100mm</i>	
<b>Finish</b>  <i>Galvanised bracing fitted with all finishes</i>	<input type="checkbox"/> Painted <input type="checkbox"/> <i>Black (Standard)</i> <input type="checkbox"/> <i>Other (Please specify):</i> <input type="checkbox"/> Galvanised
<b>Delivery Location</b>	
<b>E/O for installation</b>	<input type="checkbox"/> Yes <input type="checkbox"/> No

## Product Details:

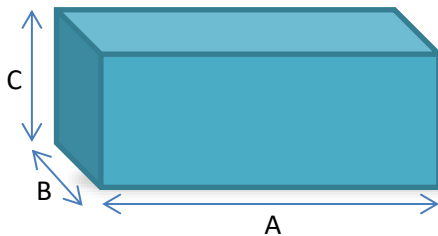

A:

B:

C:

Weight, each (kg):

## Extras:

<input type="checkbox"/> Pallet Support Bars <input type="checkbox"/> Fork Entry Bars <input type="checkbox"/> Coil Cradles <input type="checkbox"/> Pallet Backstops	<input type="checkbox"/> Timber Decking <input type="checkbox"/> Steel Mesh Decking
--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------

## Notes: