


## RANGES

### WGR - GREY PRESSED ON RUBBER

∅ 50-75mm  25-50kg



Pages | 264

### WTPR / WVGR THERMOSTATIC RUBBER

∅ 50-150mm  40-125kg



Pages | 265

### WGR / WPS / WBS - PRESSED ON RUBBER

∅ 80-250mm  50-225kg



Pages | 266

### WPK / WMK / WPD - TROLLEY WHEELS


∅ 150-400mm  30-700kg



Pages | 267

# CASTOR & WHEEL MANUFACTURERS

## RUBBER WGR SERIES

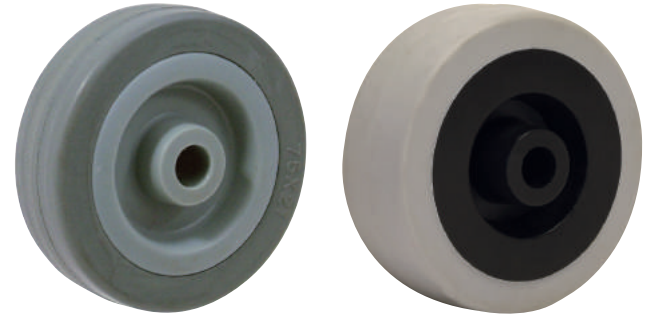

25-50kg



50-75mm



85 Shore A  
Grey Rubber On  
Polypropylene

-20°C to +60°C  
Max Speed 3kph



76 Shore A  
Grey Rubber On  
Polypropylene

-20°C to +60°C  
Max Speed 3kph

Dia (mm)	Bearing	Code	Tread (mm)	Hub (mm)	Bore (mm)	Load (kg)	Bearing	Code	Tread (mm)	Hub (mm)	Bore (mm)	Load (kg)
50	□	BZD50WGR	18	21	8	25	□	BZA50WGR	18	21	8	40
60	-	-	-	-	-	-	□	BZA60WGR	24	28	8	50
75	□	BZD75WGR	20	27	10	50	□	BZA75WGR	24	28	8	50

### Wheel Retainers



Axle Diameter (mm)

8	WRDM8
10	WRDM10

# RUBBER WTPR / WVGR SERIES



40-125kg



50-125mm



P???

85 Shore A  
Grey Rubber On  
Polypropylene



P???

87 Shore A  
Grey Vulcanised Rubber  
On Polypropylene

-20°C to +60°C  
Max Speed 3kph

-10°C to +50°C  
Max Speed 3kph

Dia (mm)	Bearing	Code	Tread (mm)	Hub (mm)	Bore (mm)	Load (kg)	Bearing	Code	Tread (mm)	Hub (mm)	Bore (mm)	Load (kg)
50	-	-	-	-	-	-	□	BZL50WVGR	18	21	8	40
	-	-	-	-	-	-	⊞	BZL50WVGRBJM6	18	21	6	40
60	-	-	-	-	-	-	□	BZL60WVGR	22	29	10	60
75	-	-	-	-	-	-	□	BZL75WVGR8/26	24	26	8	60
	-	-	-	-	-	-	□	BZL75WVGR8	24	29	8	60
	-	-	-	-	-	-	□	BZL75WVGR	24	29	10	60
	-	-	-	-	-	-	⊞	BZL75WVGRBJM6	24	29	6	60
	-	-	-	-	-	-	⊞	BZL75WVGRBJM8	24	29	8	60
80	□	BZM80WTPR	28	35	12	70	□	BZL80WVGR	24	29	10	60
	-	-	-	-	-	-	□	BZMM80WVGR	28	40	12	70
100	□	BZM100WTPRM12	30	35	12	80	□	BZL100WVGR8	24	29	8	60
	⊞	BZM100WTPRBJM8	30	35	8	80	□	BZL100WVGR	24	29	10	60
	-	-	-	-	-	-	□	BZM100WVGR	30	34	12	80
	-	-	-	-	-	-	⊞	BZM100WVGRBJM8	30	36	8	80
	-	-	-	-	-	-	□	BZMM100WVGR	30	40	12	100
125	□	BZM125WTPRM12	30	35	12	100	□	BZM125WVGR	30	34	12	100
	⊞	BZM125WTPRBJM8	30	35	8	100	⊞	BZM125WVGRBJM8	32	36	8	100
	-	-	-	-	-	-	□	BZMM125WVGR	32	44	15	125
	-	-	-	-	-	-	-	-	-	-	-	-
150	-	-	-	-	-	-	□	BZM150WVGR	32	36	10	100
	-	-	-	-	-	-	⊞	BZM150WVGRBJM10	32	32	10	100

## Wheel Retainers



Axle Diameter (mm)

8	WRDM8
10	WRDM10
12	WRDM12
15	WRDM15

□ PLAIN ⊞ ROLLER ⊞ BALL



# RUBBER WGR / WPS / WBS SERIES



50-225kg



80-250mm

Dia (mm)	Bearing	Code	85 Shore A Grey Rubber On Polypropylene				85 Shore A Black Rubber On Polypropylene				85 Shore A Black Rubber On Steel							
			Tread (mm)	Hub (mm)	Bore (mm)	Load (kg)	Tread (mm)	Hub (mm)	Bore (mm)	Load (kg)	Tread (mm)	Hub (mm)	Bore (mm)	Load (kg)				
80		BZMM80WGR	25	40	12	50		BZMM80WPS	25	40	12	50		BZMM80WBSRB	25	40	12	50
		BZMM80WGRRB	25	40	12	50		BZMM80WPSRB	25	40	12	50	-	-	-	-	-	-
100		BZMM100WGR	30	40	12	70		BZMM100WPS	30	40	12	70		BZMM100WBSRB	30	40	12	70
		BZMM100WGRRB	30	40	12	70		BZMM100WPSRB	30	40	12	70		-	-	-	-	-
125		BZML125WGR12	37.5	40	12	90		BZML125WPS12	37.5	40	12	90		BZMM125WBSRB	37.5	45	15	90
	-	-	-	-	-	-		BZMM125WPS12	37.5	45	12	90	-	-	-	-	-	-
		BZMM125WGR	37.5	45	15	90		BZMM125WPS	37.5	45	15	90	-	-	-	-	-	-
		BZMM125WGRRB	37.5	45	15	90		BZMM125WPSRB	37.5	45	15	90		-	-	-	-	-
150		BZMM150WGR	40	45	15	110		BZMM150WPS	40	45	15	110		BZMM150WBSRB	40	50	15	135
		BZMM150WGRRB	-	-	-	-		BZMM150WPSRB	-	-	-	-		-	-	-	-	
160		BZH160WGRRB	40	60	20	140		BZH160WPSRB	40	60	20	140		BZH160WBSRB	40	60	20	160
180	-	-	-	-	-	-		BZH180WPS12	50	48	12	185	-	-	-	-	-	-
200		BZH200WGRRB	50	60	20	205		BZH200WPS12	50	48	12	205		BZH200WBSRB	50	60	20	205
	-	-	-	-	-	-		BZH200WPS	50	60	20	205		BZH200WBSRB254	50	51	25.4	185
	-	-	-	-	-	-		BZH200WPSRB	50	60	20	205	-	-	-	-	-	-
	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
250	-	-	-	-	-	-	-	-	-	-	-	-		BZH250WBSRB254	50	51	25.4	225

## Wheel Retainers



Axle Diameter (mm)	Code
12	WRDM12
15	WRDM15
20	WRDM20
25	WRDM25
25.4	WRD254

# RUBBER WPK / WMK / WPD SERIES



30-700kg



150-400mm

Dia (mm)	Bearing	Code	85 Shore A Black Rubber On Polypropylene				Bearing	Code	85 Shore A Black Rubber On Steel				Bearing	Code	85 Shore A Black Rubber On Polypropylene				
			Tread (mm)	Hub (mm)	Bore (mm)	Load (kg)			Tread (mm)	Hub (mm)	Bore (mm)	Load (kg)			Tread (mm)	Hub (mm)	Bore (mm)	Load (kg)	
150	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
160	□	BZWPK1602051	40	51	20	120	-	-	-	-	-	-	-	-	-	-	-	-	
	□	BZWPK16025451	40	51	25.4	120	-	-	-	-	-	-	-	-	-	-	-	-	
180	□	BZWPK18025451	50	51	25.4	205	-	-	-	-	-	-	-	-	-	-	-	-	
	▨	BZWPKR18025451	50	51	25.4	205	-	-	-	-	-	-	-	-	-	-	-	-	
200	□	BZWPK200254451	50	51	25.4	205	▨	BZWMKR20025451	50	51	25.4	205	□	BZWPDP20012738*	43	38	12.7	50	
	▨	BZWPKR20025451	50	51	25.4	205	▨	BZWMKBJ2002575	80	75	25	250	-	-	-	-	-	-	
	-	-	-	-	-	-	▨	BZWMKBJ20025475	80	75	25.4	250	-	-	-	-	-	-	
250	□	BZWPK25025451	60	51	25.4	275	▨	BZWMKR25025451	60	51	25.4	350	-	-	-	-	-	-	
	▨	BZWPKR25025451	60	51	25.4	275	▨	BZWMKBJ2502575	80	75	25	350	-	-	-	-	-	-	
	-	-	-	-	-	-	▨	BZWMKBJ25025475	80	75	25.4	356	-	-	-	-	-	-	
260	□	BZWPK26025459	95	59	25.4	125	-	-	-	-	-	-	-	-	-	-	-	-	
300	□	BZWPK30025451	60	51	25.4	280	▨	BZWMKR30025451	60	51	25.4	-	-	-	-	-	-	-	
	▨	BZWPKR30025451	60	51	25.4	280	▨	BZWMKBJ3002575	80	75	25	400	-	-	-	-	-	-	
	-	-	-	-	-	-	▨	BZWMKBJ30025475	80	75	25.4	-	-	-	-	-	-	-	
350	□	BZWPK35525466	80	66	25.4	300	-	-	-	-	-	-	-	-	-	-	-	-	
	▨	BZWPKR3552566	80	66	25	300	▨	BZWMKLR3502066	75	66	20	300	-	-	-	-	-	-	
	▨	BZWPKR35525466	80	66	25.4	300	▨	BZWMKLR3502566	75	66	25	300	-	-	-	-	-	-	
	-	-	-	-	-	-	▨	BZWMKLR35025466	75	66	25.4	300	-	-	-	-	-	-	-
	-	-	-	-	-	-	▨	BZWMKR3552066	80	66	20	400	-	-	-	-	-	-	-
	-	-	-	-	-	-	▨	BZWMKR3552566	80	66	25	400	-	-	-	-	-	-	-
	-	-	-	-	-	-	▨	BZWMKR35525466	80	66	25.4	400	-	-	-	-	-	-	-
	-	-	-	-	-	-	▨	BZWMKBJ3502575	80	75	25	400	-	-	-	-	-	-	-
	-	-	-	-	-	-	▨	BZWMKBJ35025475	80	75	25.4	400	-	-	-	-	-	-	-
400	□	BZWPK40025466	100	66	25.4	350	▨	BZWMKLR4002066	100	66	20	400	-	-	-	-	-	-	
	▨	BZWPKR4002566	100	66	25	350	▨	BZWMKLR4002566	100	66	25	400	-	-	-	-	-	-	
	▨	BZWPKR40025466	100	66	25.4	350	▨	BZWMKLR40025466	100	66	25.4	400	-	-	-	-	-	-	
	-	-	-	-	-	-	▨	BZWMKR4002066	100	66	20	700	-	-	-	-	-	-	
	-	-	-	-	-	-	▨	BZWMKR4002566	100	66	25	700	-	-	-	-	-	-	
	-	-	-	-	-	-	▨	BZWMKR40025466	100	66	25.4	700	-	-	-	-	-	-	
	-	-	-	-	-	-	▨	BZWMKBJ4002575	100	75	25	700	-	-	-	-	-	-	
	-	-	-	-	-	-	▨	BZWMKBJ40025475	100	75	25.4	700	-	-	-	-	-	-	

## Wheel Retainers



\*Axle Cap

Code

RED  
BLACK

BZWPDCAPRED  
BZWPDCAPBLACK

Axle Diameter (mm)

12.7	WRDM15
20	WRDM20
25	WRDM25
25.4	WRD254